



2-Way DisplayPort Switcher



User Manual


AC-1757

Box Contents:

1 x 2-Way DisplayPort Switcher

1 x 5VDC Mains Power Adaptor

Diagram:

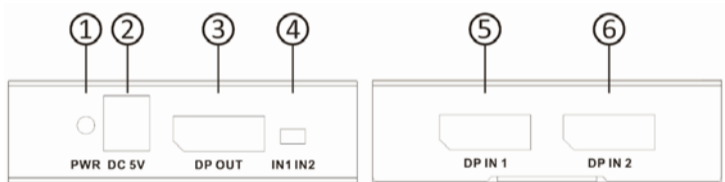

- 1) **LED Power Indicator:** The red LED will be illuminated when the device is connected with the power supply.
- 2) **5VDC Power Socket:** Plug the 5VDC mains power adaptor into the unit and connect the adaptor to a

power point socket.

- 3) **DP Out:** Connect a DisplayPort computer monitor, TV or projector with a DisplayPort cable.
- 4) **Input Selector:** You can choose between DisplayPort source 1 or 2 by using the switch.
- 5) **DP In 1:** Connect a DisplayPort source with a DisplayPort cable.
- 6) **DP In 2:** Connect a DisplayPort source with a DisplayPort cable.

Please Note:

HDMI and DVI output achievable with use of a passive adaptor.

Mini DisplayPort can be used with an additional converter cable.

Application Diagram:



Specifications:

Inputs: 2 x DisplayPort

Output: 1 x DisplayPort

Resolution: up to 4X2K (4096 x 2160) @ 60Hz (16 Bit)

DisplayPort: V1.2a

HDMI: 1.4 (With Use Of Passive Adaptor)

Bit Rate: up to 21.65Gbps (5.4Gbps per lane)

Audio: up to 7.1 Channel @ 192kHz Sample Rate

Compliant: DP++, HDCP

Power: 5VDC, 1A

Power Consumption: 3W

ESD Protection: $\pm 8\text{kV}$ (Air-Gap Discharge)

$\pm 4\text{kV}$ (Contact Discharge)

Dimensions: 71(L) x (61)W x 21(H)mm

TechBrands by Electus Distribution Pty. Ltd.

320 Victoria Rd, Rydalmere NSW 2116 Australia

Ph: 1300 738 555

Int'l: +61 2 8832 3200

Fax: 1300 738 500

www.techbrands.com

Made in China