


Receiver operation:

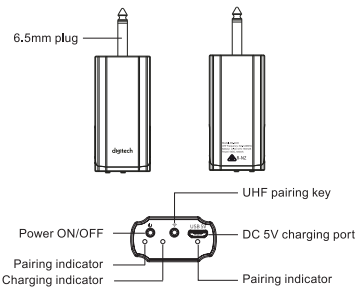

1. Power ON / OFF:

Press "Ⓟ" for 3s and it's powered on with green indicator light being on all the time. Press "Ⓟ" 3s again and it's powered off with green indicator light going out.

2. DC 5V charging port:

- Please switch off the receiver before charging. Use the charger with DC 5V output connects with Mini-USB cable to charge the receiver.
- The red indicator light will be on all the time when charging and it will go out after fully charged.
- Please connect the packed USB charging cable with the USB port of DC 5V (500mA ~ 1.5A) charger.

Note:

1. Normally, charging time is 3~4 hours;
2. We suggest fully recharge the receiver before you using it at the first time;
3. Please unplug the charger as soon as it is fully charged.

Technical Parameters:

Receiver			
Battery capacity:	750mAh	Working time:	4-6 hours
Product size:	105*36*19mm	Net weight:	45g

Transmitter			
Polymer battery:	1800mAh	Working time:	Up to 10 hours
Input:	5V/500mA	Net weight:	86.5g
Product size:	301*200*70mm		

Trouble shooting:

1. No sound.

- A. The indicator lights are not being on: Please charge the receiver.
- B. The indicator light of transmitter shows low: Please charge the transmitter.
- C. Please try to pair the wireless frequency manually.

2. With distinct howling.


- A. Please do not point the microphone toward the speaker and the distance between microphone and speaker should be about 3M;
- B. Please turn down the volume to avoid howling in a small room.

DISTRIBUTED BY:

TechBrands by Electus Distribution Pty. Ltd.
320 victoria Rd, Rydalmere NSW 2116 Australia
ph:1300 738 555 Int'l:+612 8832 3200 Fax:1300 738 500
www.techbrands.com
Made in China



Portable UHF Microphone Headset System User Manual

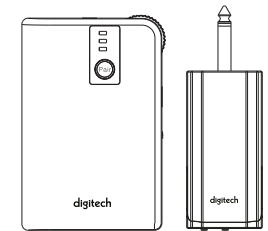

AM-4045

Warning:

1. Please don't put the product and accessories nearby fire or other environments.
2. Please don't put the product and accessories near water or damp places.
3. Please don't open or tear down the battery compartment. It may cause an explosion if the battery is replaced improperly. Avoid putting the battery in water, fire or near a hot environment.
4. This product needs to use the supplied power adapter (DC5V,500mA) to charge. Once fully charged, you should remember to unplug the power cord or power socket.
5. If you don't need to use the unit, rotate the knob to "Off" to turn off the transmitter, hold down the power switch more than 3 seconds to power off the receiver.
6. Please turn off the product in flammable and combustible areas.

Main features:

1. Easy to setup and use;
2. Transmitter with LED;
3. Rechargeable Receiver and Transmitter;
4. Lapel microphone good pickup;
5. Hands free and Move around;
6. Humanized appearance design;
7. Wireless transmission distance;
8. Support 30m barrier-free wireless transmission distance.

Brief Introduction:

This wireless microphone system is for voice amplifying. Which is convenient for users, hands free and move around.

How to use:


Plug the receiver into the Mic jack, turn on the audio device. Turn on the receiver and transmitter, plug the lapel mic into the transmitter. Then you can speak.

UHF manually pairing:

(Limited to UHF is disconnected or pair with another set)

- Step1: Plug the receiver into your Mic jack, and turn on your audio device;
- Step2: Turn on the receiver and short press the pair button, at this time you could find the blue indicator flashes on the receiver;
- Step3: Plug the lapel mic into the transmitter; Turn on the transmitter and long press the "Pair" key for about 3s, then you could find the blue indicator lights on the receiver becomes constant blue; It means that the receiver and transmitter are paired successfully, then you could start to use them.

Transmitter operation:

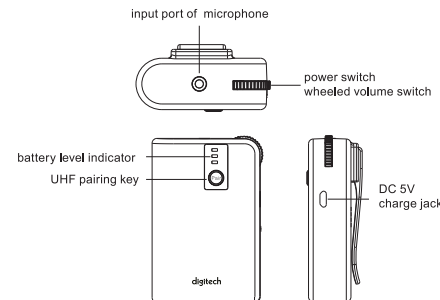

1. Turn on/off:

- Insert the wired microphone into the "MIC" input port of waist hanging UHF wireless transmitter;
- Push the switch to "On" to turn on the UHF wireless transmitter and the battery level indicator will on.
- Push the switch to "OFF" turn on the UHF wireless transmitter and the battery level indicator will go out.
- Adjust volume of waist hanging UHF wireless microphone.

In the status of UHF wireless amplification, you can adjust the volume of amplification through the wheeled volume switch of waist hanging UHF wireless transmitter.

Note: You can also adjust the volume of amplification by operating the "+" & "-" of multimedia UHF wireless voice amplifier.

2. Charge the waist hanging UHF wireless microphone & battery notifier:

- Battery capacity indication: blue lights means 100%; yellow lights means 50%; "Low" red lights means low battery and please charge it timely;
- Charging method: Turn off the waist hanging UHF wireless transmitter, and connect the DC 5V charger with the transmitter, then connect with the 100~240V socket; the battery capacity indication "Half" and "Low" will flash one by one when charging; and the three lights 100%, 50% and "Low" will on all the time after charged.

Note: We suggest fully recharge the waist hanging UHF wireless microphone before you using it at the first time.