


2.4 G air mouse operating instructions

One. Products Diagram

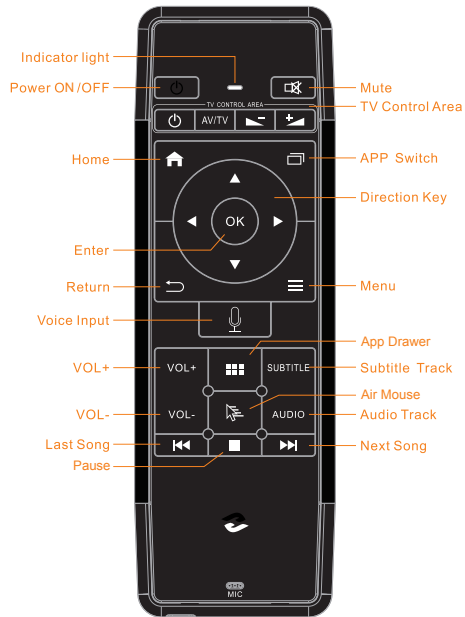

Two. Instructions

1. Pairing:

- * Insert the USB receiver to the USB host port of your device, then the remote control will be paired automatically after the load is complete. If the remote control flashes in red and blue, then the remote control is not paired. Need to repair it following up below steps.

Start pairing	Press "VOL+" and "VOL-" at the same time, then the indicator will flash in red and blue for 5 times and then go off. The indicator will be blue After 2 seconds, the remote control now enter to pairing mode. Insert the receiver to the USB port of your device, and then the remote control near the receiver.
---------------	---

Matching Success	Blue indicator quickly flashes 3 times and then turn off.
Matching Failure	Indicator keeps in blue, and 30 seconds later, remote control will exit pairing mode automatically.
Remark	In pairing mode, besides the "vol"+"vol-" ,press any key to exit the pairing mode.

*The remote and receiver are paired by default.

2. Key Function:

Power switch:	Control box power on / off (IR learning function).
Mute:	Turns off all sounds, then press again to restore.
TV control area:	Controls the corresponding function of the TV area (IR function).
Home:	Go directly to the Home button.
APP Switch:	Into APP task switching interface
Direction key:	control the direction of up and down ,left and right.
Enter:	Enter the current action.
Return:	Returns to the previous operation interface.
Menu:	The corresponding menu function appears.
Voice switch:	control voice on / off.
"VOL+" and "VOL-":	adjust the volume level.
Subtitle Track:	Subtitle switching
Audio Track:	Track switching
APP Manage :	Into all app interfaces
Cursor Lock:	Controls the mouse to switch between the cursor.
Stop:	Stops the current multimedia playback.
Last song, next song:	control multimedia into the next song.

3. Full Keyboard:



A-Z:Standard keyboard characters and function.

Caps:Caps Lock.

Back:Delete the previous character.

Enter:Confirm the current operation.

Fn:Key combination (press other keys at the same time to enter the blue silk screen characters).

Numbers and symbols: standard keyboard numbers and functions.

CTRL+ALT+DEL/WWW./ .COM:Shortcut input.

4. IR learning Function:

1-Getting into IR programming mode.

Long press "white power on", at first, the LED indication on top of AR1976 will flash in Red, then it will stay red still, then release the "white power on" button. Click "white power on" again, the led indicator will flash in red again, at this time point your IR remote which you want to be programmed directly to AR1976, and long press the "power on" of the IR remote. until the LED indicator of AR1976 is still RED again, now you are in the programming/copy mode.

2-Copy your IR remote to AR1976.

Click the button of AR1976 you want to copy, the LED indicator flashes in RED, and then click the knob of the IR remote which you want to be copied, if it is programmed successfully, the LED indicator will first flashes in RED more quicker and then turn to still RED, otherwise it is not successfully. Press the next knob of AR1976. Repeat above process until you have programmed all of the knobs of your IR remote control to AR1976.

3-Exit IR programming mode.

click "Green/RED power on" button of AR1976 to exit the IR programming mode.

4-Now you are ready to use our AR1976 to control everything.

5. Air Mouse Function

Click "air mouse" knob to activate air mouse function, click it again to turn off this function.

6. Voice function operation:

- Instant voice input: press the voice key open the voice function, the blue light flashing in the voice input state, the front of the remote control at the bottom of the MIC input speaking, after the completion, release button close the voice function automatically.
- Enter a long time voice input: press voice button twice quickly, the blue light flashing in the voice input state, the front of the remote control at the bottom of the MIC input speaking, after the completion of a single click button to close the function of voice speech.

Three. Working Status

Key operation: The indicator flashes in blue while operating the remote control.

Air mouse mode: When air mouse function is activated, the indicator will flash in blue all the time. If the standing time of the remote control is more than 15 seconds, then the indicator will go to power saving mode. As long as move the remote or click any knob, the remote control will come back to air mouse mode again.

Power saving mode: in the absence of open air mouse, 3 seconds without any key operation, remote control into the standby mode.Keep the mode for 5 seconds, the remote will enter the sleep mode.Under the air mouse mode ,when 15 seconds without shaking or keystrokes, remote control to enter standby mode,and the blue light goes out,keep standby mode for 3 minutes,the remote enter sleep mode.

Four. Product Parameters

Transmission and control: 2.4GRF wireless radio-frequency technology.

Sensor: 3 Gyro +3 Gsensor

Key number: 63 keys

Remote control distance: ≥10 meters

Battery type: 500mah lithium battery

Overall power consumption: less than 30mA

Standby power consumption: less than 30uA

Size: 169*55.5*13MM