




VGA & Audio to HDMI Converter AC-1719 User Manual

CONNECTING & OPERATION

Before installation of this item, please ensure all devices you wish to connect have been turned off.

- 1) Connect the VGA Male cable and audio cable of the converter to the PC or alternate VGA output.
- 2) Connect the Converter's HDMI output to the TV's HDMI input.
- 3) Connect the USB cable of the converter with PC or USB power supply (not supplied).
- 4) The image does not need to be adjusted, the converter will position it automatically, the user may adjust the horizontal position under some extreme conditions.

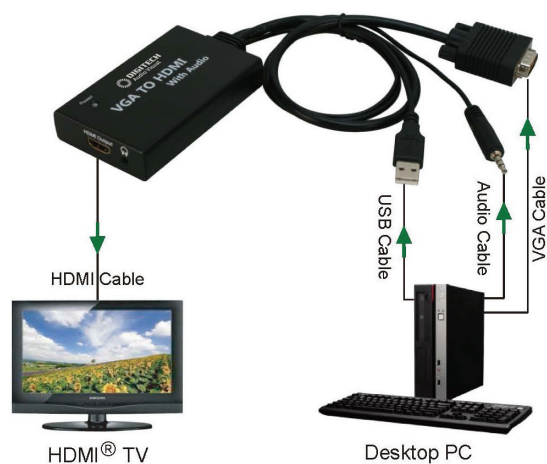

At the end of its serviceable life, this product should not be treated as household or general waste item. It should be handed over to the applicable collection point for the recycling of electrical and electronics equipment.


PANEL DESCRIPTIONS

Please study the panel drawings below and become familiar with the signal input(s), output(s) and power requirements.

INPUT



OUTPUT



SPECIFICATIONS

Input Video Signal:	0.5-1.0V p-p
Input DDC Signal:	5V p-p (TTI)
Maximum Single Link Range:	1920x1080, 1080p
Output Video:	HDMI
VGA:	640x480 60Hz/75Hz/85Hz 800x600 60Hz/72Hz/75Hz/85Hz 1024x768 60Hz/70Hz/75Hz/85Hz 1280x800 60Hz 1280x960 60Hz 1280x1024 60Hz/75Hz/85Hz 1360x768 60Hz 1680x1050 60Hz 1600x1200 60Hz 1920x1080 60Hz
HDTV:	480i/576i/480p/576p/720p /1080i/1080p
Frequency:	Up to 165MHz
Video Amplifier Bandwidth:	1.65Gbps/165MHz
Interlaced:	480i@60Hz, 576i@50Hz 1080i@50Hz/60Hz
Progressive:	480p@60Hz, 576p@50Hz 720p@50Hz/60Hz, 1080p@50Hz/60Hz
Limited Warranty:	1 year parts and labor
Operating Temperature:	0°C to +70°C
Operating Humidity:	10% to 85% RH (no condensation)
Storage Temperature:	-10°C to +80°C
Storage Humidity:	5% to 95% RH (no condensation)
Power Supply:	USB Bus Power