



60W Speaker Attenuator Wall Plate AC-1751 User Manual

User Manual

The Volume Control is designed for wall mounting and will fit all standard Australian electrical junction boxes (surface or recessed). It has a power rating of 60 watts RMS which will suit most applications except those where very high power is required. The Volume Control has been built to the highest of standards ensuring quality electronic components and correct performance. The Volume Control has several unique advantages. When at full volume the Volume Control is not circuit. When at OFF position the Volume Control is open circuit (there is no load on the amplifier). With an amplifier output of 60 watts RMS the Volume Control will not dissipate any noticeable heat on any level setting.

SPECIFICATIONS:

Speaker Power Rating: 60WRMS, 20Hz -

20kHz

Speaker Impedance: $4, 8, \text{ or } 16\Omega$ Speakers

Switch: 0dB (straight through),

-6dB, -12dB, -18dB,

-24dB, Off (no

connect) Mounting: Standard electrical


wall plate Weight: 109g

Dimensions: $115(W) \times 74(H) \times 115(W) \times 74(H) \times 115(W) \times$

50(D)mm

TIPS: The Volume Control does not replace the need for impedance matching in multiple speaker installations. Long cable runs can seriously affect sound quality.

Make sure good quality cable is used to maintain sound quality.

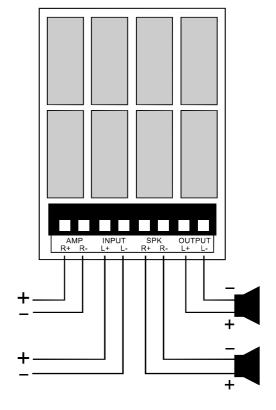

Distributed by: TechBrands by Electus Distribution Pty. Ltd. 320 Victoria Rd, Rydalmere NSW 2116 Australia Ph: 1300 738 555 Int'l: +61 2 8832 3200 Fax: 1300 738 500 www.techbrands.com Made in China

CAUTION: DO NOT USE NEAR 240 VOLT POWER SWITCHING OR CABLING.