

Composite Audio Video to HDMI 4K Upscaler Converter



AC-1776

User Manual

Box Contents


- 1 x Composite Audio Video to HDMI 4K Upscaler Converter
- 1 x 5V/1A DC Power Supply Adaptor

Operating Instructions

- 1. Connect the Video port to the input port of your source equipment such as a DVD player.
- 2. Connect the analogue audio input port to the output port of your analogue audio equipment.
- 3. Connect a display such as a monitor, TV or Projector to the HDMI output on the Converter.
- 4. Power on the device and display.



Operation Controls and Functions

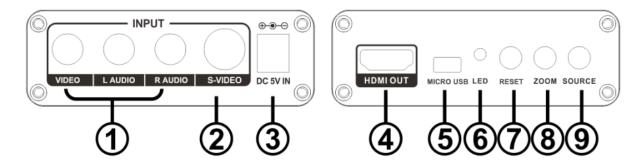

- 1. Video/L,R input: Connect the Video/L,R port to the input port of your source equipment such as a DVD player.
- 2. S-VIDEO input: Connect the S-VIDEO port to the input port of your source equipment such as a camera.
- 3. DC 5V IN: Connect the 5V DC power supply into the Converter.
- 4. HDMI OUT: The HDMI OUT connects to HDMI equipped TVs or monitors.
- 5. MICRO USB: Socket for micro USB connection.
- 6. Power LED: This red LED illuminates when the device is connected with power supply.

- 7. Reset Button: Press this button to select the output resolution.
- 8. ZOOM Button: Press this button for scaling of the output picture.
- 9. SOURCE Button: Press this button to switch between Video and SV.

Specification

Compatible with: HDMI 1.4 standards

Input ports: 1 x RCA (Yellow, White, Red). 1x S-Video, 1 x Min- USB

Output ports: 1 x HDMI

Dimensions (mm): 93(D) x 84 (W) x28 (H)

Weight(g): 165g

CVBS/S-VIDEO input: PAL, NTSC3.58, NTSC4.43, SECAM, PAL/M,PAL/N standard TV

formats

HDMI output resolution: 4Kx2K@60Hz, 4Kx2K@30Hz, 1080P@60Hz, 720P@60Hz

Operating Temperature: $0^{\circ}\text{C} \sim 40^{\circ}\text{C} / 32^{\circ}\text{F} \sim 104^{\circ}\text{F}$

Storage Temperature: $-20^{\circ}\text{C} \sim 60^{\circ}\text{C} / -4^{\circ}\text{F} \sim 140^{\circ}\text{F}$

Elative Humidity: 20 ~ 90% RH (Non-condensing)

Power Consumption (Max): 3.5W

ESD Protection: Human Body Model: ± 8kV (air-gap discharge)

± 4kV (contact discharge)

Distributed by:

TechBrands by Electus Distribution Pty.Ltd.

NSW 2116 Australia Ph: 1300 738 555 Int'l: +61 2 8832 3200 Fax: 1300 738 500

www.techbrands.com

Made in China