




WS-106S

Flood Sensor

For use with the BOLTEK Home Protection System

1. Introduction:

The Flood Sensor consists of two parts, including a transmitter and a water sensor (which should be positioned where the presence of water needs to be monitored such as under a kitchen sink, bath or in a cellar). On sensing the presence of water, the Flood Sensor triggers the Smart Security System.



2. Features / Spec:

- Triggers the system when a flood or water leak is detected
- Ideal for areas prone to flooding or potential water leakage such as laundry area, kitchens, bathrooms and hot water tanks
- Features low battery warning (Can check through the Boltek App)
- Easy installation with full instructions & installation kit provided

3. How to use

3.1 Location

Determine the location of the Flood Sensor, which should be placed:

- Where the presence of water may be detected. The metal contacts of the water sensor must both be in direct contact with water for the alarm to activate, but no other part of the sensor should be allowed to be submerged in water.
- On any hard or flat surface using the double-sided adhesive pads provided

3.2 Installation

• Power up the Flood Sensor

- To activate, pull down the bottom cover of the transmitter and install a AAA alkaline battery

• Ensure the mounting surface is dry and clean

- If mounting onto a porous surface such as wood or concrete, make sure the surface is painted to provide proper adhesive bonding

• Mount the transmitter with double-sided adhesive pad:

- Peel back the protective film of the double-sided adhesive pad on the transmitter and press the transmitter firmly in place against the mounting surface until firmly attached.

Note: The water sensor part of the Flood Sensor can be fixed by the double-sided adhesive pad (included) as required. Repeat the method of transmitter part mounting.




WS-106S

3.3 Operation

• Add the Flood sensor to the alarm system as follow:


- Operate on the BOLTEK control panel under the "SETTINGS" and go to "ADD SENSORS" page.
- Trigger the sensor and the sensor name will appear on screen together with a "DING DONG" sound. Press "ADD MORE" button if you want to add more sensors or press "DONE" to complete the enrollment.
- Sensors can also be deleted on the "ADD/ DELETE SENSORS" screen. Select the sensor name on panel and then press the "DELETE" button. The sensor name will be disappeared and the sensor would be deleted.

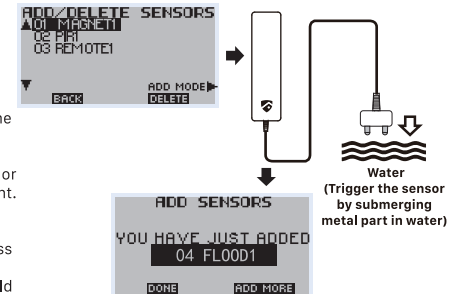


3.4 Battery

Battery status can be checked on the smart panel and BolTEK APP under "EVENT History". When the battery is in low battery status, the "battery ICON" will be shown under the sensor triggered record. Change the battery to make sure the sensors can work properly. To change the battery, pull down the bottom cover of the transmitter, and insert a new AAA alkaline battery. Push the bottom casing back to the transmitter and screw.

- Do not allow the battery to corrode or leak as this may cause permanent damage to the product.
- Take care to insert the battery with the correct polarity as shown inside the battery compartments. Do not use rechargeable battery.
- Dispose of used batteries according to local laws and regulations. **DO NOT BURN.**



Low Battery Icon (reference)



Tamper-proof Switch

Battery Position

4. Disclaimer

- Even the most advanced alarm systems cannot guarantee 100% protection against burglary or environmental problems. All alarm systems are subject to possible compromise or failure-to-warn for a variety of reasons.
- Inadequate maintenance is the most common cause of alarm failure; therefore, test your system at least once per week to make sure the sensors and sirens are working properly.
- Although having an alarm system may make you eligible for reduced insurance premiums, the system is no substitute for insurance.

What's inside: 1 x Flood Sensor 1 x AAA Alkaline Battery
1 x Quick Start Guide

