

POWERTECH PLUS

4000mAh Solar Rechargeable Power Bank



User Manual

MB-3723

Box Contents:

- 1 x 4000mAh Solar Rechargeable Power Bank
- 1 x USB Micro B Charging Cable
- 1 x Lanyard

Product Diagram:




Power: Press to display the current battery level status

Micro B Input: To charge the power bank's in-built battery using a USB micro B cable

USB Type-A Output: To charge your device

LED Indicators: Shows current percentage of battery remaining:

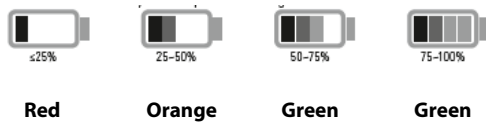


Charging The Power Bank:

USB Cable / Power Supply:

1. Insert the USB micro B cable included in to the input of the power bank.
2. Insert the opposite end of the USB cable in to a PC, laptop or a suitable USB mains power adaptor (not included) to begin charging the device.
3. The LED indicator should now be flashing once charging has begun.
4. All four LED indicators will stop flashing and remain lit once the power bank is now fully charged.

Please Note: If the device is unused for 16 seconds or has under 50mA of load; it will automatically shut down to save battery.

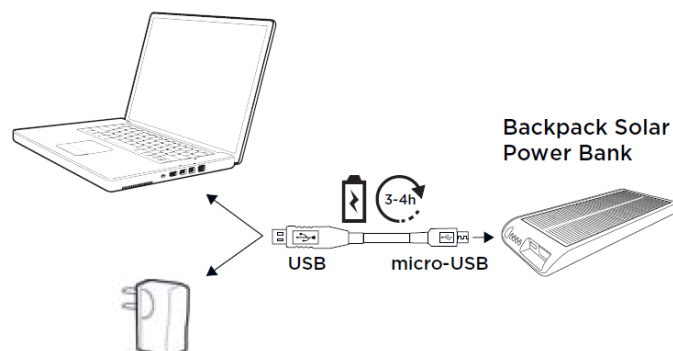

Solar Panel:

1. Place the power bank in an upright position located in direct sunlight.
2. Leave the solar panel in sunlight for up to 25-27 hours depending on sun light conditions.
3. Press the power button occasionally to check if the power bank is showing that it has been charging.


Charging Your Device:

1. Insert the supplied USB cable in to the output of the solar power bank. If your device does not have a micro B socket, then please use the required cable for your device.

Please Note: For best performance, please use your original charging cable supplied with your device.

2. Plug the opposite end of your USB cable in to your device such as a smartphone or tablet.
3. Your device should now begin charging automatically.
4. The LED indicators will begin flashing to show you the current battery level status.
5. Once your device has been fully charged, the power bank will shut off automatically after 16 seconds of inactivity.

Please Note: If the LED indicator does not show when the power button is pressed or is flashing red, it indicates that the battery is too low. Please charge the power bank immediately.

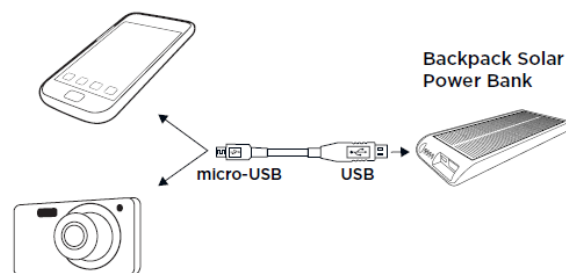

Safety Instructions & Maintenance:

1. Please charge the device before first time use to ensure the battery is fully charged.
2. Ensure correct voltage is used as continuous excessive voltage could damage your equipment.
3. Do not try to use this power supply with devices requiring more than 2100mA.
4. Always turn off your digital device before you connect/disconnect from the USB charger.
5. Keep the device away from wet, corrosive or high temperature environments.
6. Do not attempt to open this unit as it may cause damage to the power bank.
7. Do not scratch or damage the surface of the solar panel.
8. Please charge the power bank every 6 months to keep the battery maintained.

Specifications:

Input: USB 2.0 Micro B
Output: USB 2.0 Type A
Voltage Input: 5VDC
Current Input: 1A
Voltage Output: 5VDC
Current Output: 2.1A
Battery Capacity: 4000mAh
Battery Type: 3.7V, Li-Ion
Solar Panel: Polycrystalline 7.2V, 1W
USB Charging Time: 4hrs
Solar Charging Time: 25-27hrs
Dimensions: 155(L) x 70 (W) x 15(H)mm

Distributed by:
TechBrands by Electus Distribution Pty. Ltd.
320 Victoria Rd, Rydalmere NSW 2116 Australia
Ph: 1300 738 555
Int'l: +61 2 8832 3200
Fax: 1300 738 500
www.techbrands.com
Made in China