
2.4G 3.5CH RC Helicopter Takeoff In Altitude Hold And **Landing Version**

Instruction Manual

Ages 14+

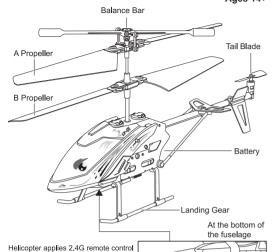


Switch

Press the one-key start button to control the helicopter

to ascend to the altitude of 1.2 meter and hover stably

lea rn other operations to control the helicopter to turn


left and right, Ascend, Descend, Forward and backward.

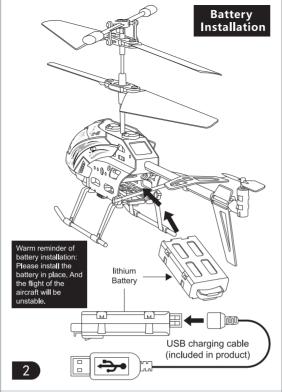

Know Your Remote Control

Operation board of remote control

One Key Take Off / Landing High / Low Speed Control (Press short time) (Press short time) LED Light Button Emergency Stopping (Press long time) (Press long time) 2.4G Transmitter Ascend



WARNING:

Right Fing-tuning

High / Low speed control: The helicopter at slow speed when you press the button and hear a beep sound; While it at high speed ith a double beep sound


⊕ 44A ⊖ W 9 444 10 ⊕t AAA 1.5V ⊖ Battery Cover

Install The Remote Batteries

Open the battery case and insert 3 AAA batteries by the correct polarity. Close the battery cover, Tighten the set

Pre-takeoff Instructions

After the charging completes, Put the helicopter on level surface and turn the power switch to the "ON" position when the helicopter's LED light flashes, Power on the remote control to proceed pairing that the remote control's LED light turns from flashing to solid indicates. The process of pairing has been successful and the helicopter is ready for ofher operations. (The process of pairing takes about 3



Notes:

1. Ensure the polarity

symbols inside the

. Do not mix new and

types of batteries. 1. When the remote control's indicator

light fiashes. Which

indicates the remote

control has low

voltage. Please replace with new

batteries

old hatteries 3. Do not mix different

battery compartment.

eumbole on the batteries match the

Before take off, Calibrated aircraft position ensure it is in the best

Takeoff In Altitude Hold **And Landing Instructions**



Turn on for 3 seconds, Then press the reset start rotating, It takes about 2 seconds to rise of 1.2 meter after enter in idle state press a second time to land and the blades rotate slowly. The aircraft lands slowly Pressing the button for long time to stop I

P.S. The hovering aircraft is able to be gaining height after pushing up the left joystick. Or pull down to reduce height. And to adjust to be



Illustrations of auto takeoff and landing (The helicopter hovers at altitude of 1.2 meter after take off)

Battery Charging For Drone



and plug into a wall socket.

Notes

1. Turn the power switch to the "OFF" position before charging.

2. Connect the USB jack on the bottom of the fuselage to the charging cable, And use a charger or computer to connect the charging current to less than 2A.

3. The USB's indicator light turns solid when it start to charge and turns off when the charging compltes It has a charging time of 50 minutes and gives a flying time of 10

4. The helicopter's bottom LED light turns up when the helicopter battery is low.

5. Please use original charger for baltery charging. Chargers from others might cause damage to the battery.

▲ Battery Instructions

- There is a certain risk when using lithium battery. It may cause fire, Body injury or property loss users must be aware of the risks and take full responsibility of using
- If battery leakage occurs, Please avoid contacting your eyes or skin with electrolyte once it happens, Please wash your eyes with clean water and seek medical care immediately.
- Please remove the plug immediately if you sense any peculiar smell, Noise or smooth Install the battery in place when replacing the battery to make the aircraft more stable, Faifure to do so will cause the aircraft to advance automatically.

▲ Charging Matters Needing Attention

- Please use the charger from original factory to ensure your safe usage.
- Do not charge deformed/ worn out battery Do not over charge battery please unplug the charger once fully charged.
- Do not charge the battery next to infiammables, Such as carpet, Timber floor or wood fumiture or on the surlace of electro-conductive objects.
- ·Please always keep an eye on the battery when charging
 - Do not charge battery which not cool down yet the charging temperature should be between 0°C to 40°C.

WARNING

- . Please keep flying helicopter away from crowd. The incorrect installation Improper operation and electronic equipment malfunction will cause the damage or injury.
- 2. Fly in correct according to the instruction strictly.
- 3. Eachine shall not be held reponsibility for any issue caused by improper operation or using.
- 4. Recammendations for above 14 years old. Close supervision is required when using this equipment underthe age of 14.

Precautions

Left Fine-tuning

3

- 1. If the battery voltage is low, either the helicopter or the remote control, Please control the helicopter in a comparatively short range.
- 2. Please operate the helicopter within a range of 30-40 meters otherwise it might cause control toss.
- 3. If the helicopter's battery is low the helicopter might fail to take off please immediately stop the operation and turn off the power to avoid damage to the battery. If you will suspend the device for some time please take the battery out of the device and turn the power switch to the "OFF" position.
- 4. Please immediately repair any damage or deformation once found if severe damage has been caused. Such as rotor breakage. Please do not fly the helicopter to avoid body injury.
- 5. Please remove the battery from the remote control if you will suspend the remote control for a long time in case of battery leakage or other damage to the product.
- 6. Please operate the helicopter correctly and appropriately to avoid accidents such as crash or collision, Which might minimize the product's lifespan.
- 7. The helicopter applies 2.4G remote control system. Please ensure the battery has been fully charged before flight, And do not fly it at low battery state otherwise it might lose control.
- 8. Please keep all the components in moisture-free places as this might lead to operation failure
- 9. Please thoroughly inspect the helicopter and all parts of components each time beforeflight to ensure flight safety.
- 10. Please power on the remote control before flight and power it off after flight

Battery Recycling Do not dispose the battery in daily rubbish. Please familiarize yourself with the local garbage disposal ethod and disposal it according to the special requirement.


Don't Fly Helicopter At The Place With These Signs



- 1. Do not store the helicopter & controller in an environment where it is exposed to moisture, Dust, Direct sunlight or extremely high or low temperatures.
- 2. Use only the charger that is made for use with this model helicopter.
- 3. Make a complete inspection before flying the helicopter. Do not let the helicopter fly out of sight when flying.
- 4. Make sure that there is nobody using the same frequency as you at the same time in the room

FAQ		
Problems	Causes	Solutions
Remote controller does not work	Batteries installed improperly	Check and make sure that the batteries are installed by the right polarity
	The batteries are weak	Replace with new or freshly charged batteries
Helicopter does not operate smoothly	Failure to match code from remote controller	Turn off the helicopter and match code again
	Lose control in the wind	Do not fly the helicopter in significant winds
Helicopter does not fly high enough	Rotor speed is too low	Push up the left throttle
	Helicopter is not fully charged	Make sure the helicopter battery is fully charged

8

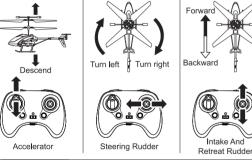

Trimming Helicopter

system to enable multiple players

compete without interference. It is

and rolls and altitude hold etc.

Operations

easy to operate via remote control to

control functions such as flying, Flips

Press "One-key start" button to control the helicopter to ascend to the altitude of 1.2 meter and hover stably.



Feel free to attempt diverse

flying skills once you have


mastered the basic

flight operations.



clockwise. Press the "Left fine-tuning" button to adjust ts position until it stays still





revolves counter-clockwise Press the "Right fine-tuning" button to asjust its position

