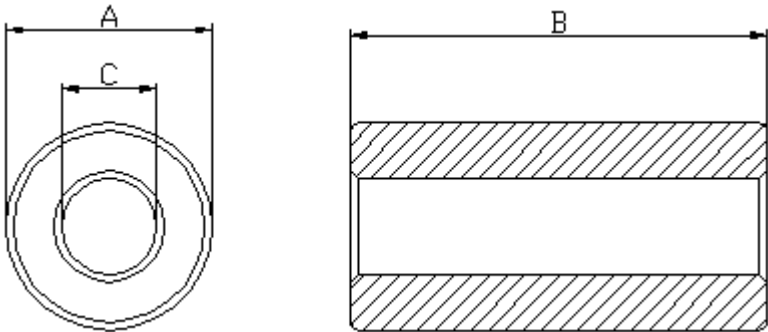


SPECIFICATION

ITEM : LF1260																																				
<p>(1).DIMENSION(Unit : m/m)</p> <div style="display: flex; justify-content: space-around; align-items: center;">  </div>		A	16.0±0.35	m/m																																
		B	28.5±0.6	m/m																																
		C	8±0.3	m/m																																
		D		m/m																																
		E		m/m																																
		F		m/m																																
		G		m/m																																
		H		m/m																																
		I		m/m																																
		<p>(2).ELECTRICAL REQUIREMENTS :</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">L</td> <td style="width: 15%;">uH mH</td> <td style="width: 15%;">TEST FREQ.</td> <td style="width: 15%;">KHZ MHZ</td> </tr> <tr> <td>Q</td> <td></td> <td>TEST FREQ.</td> <td>KHZ MHZ</td> </tr> <tr> <td>RDC</td> <td></td> <td></td> <td></td> </tr> <tr> <td>IDC</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Z</td> <td>100 Min OHM</td> <td>TEST FREQ.</td> <td>25 MHZ</td> </tr> <tr> <td>Z</td> <td>160 Min OHM</td> <td>TEST FREQ.</td> <td>100 MHZ</td> </tr> <tr> <td>Z</td> <td>OHM</td> <td>TEST FREQ.</td> <td>MHZ</td> </tr> <tr> <td>Winding</td> <td colspan="3">0.8x100mm 2UEW 1Ts</td> </tr> </table>		L	uH mH	TEST FREQ.	KHZ MHZ	Q		TEST FREQ.	KHZ MHZ	RDC				IDC				Z	100 Min OHM	TEST FREQ.	25 MHZ	Z	160 Min OHM	TEST FREQ.	100 MHZ	Z	OHM	TEST FREQ.	MHZ	Winding	0.8x100mm 2UEW 1Ts			P
L	uH mH	TEST FREQ.	KHZ MHZ																																	
Q		TEST FREQ.	KHZ MHZ																																	
RDC																																				
IDC																																				
Z	100 Min OHM	TEST FREQ.	25 MHZ																																	
Z	160 Min OHM	TEST FREQ.	100 MHZ																																	
Z	OHM	TEST FREQ.	MHZ																																	
Winding	0.8x100mm 2UEW 1Ts																																			
<p>(3)TEST INSTRUMENTS</p> <ul style="list-style-type: none"> <input type="checkbox"/>HP 4285A Q.METER <input type="checkbox"/>HP 4285A L.CR METER <input type="checkbox"/>LABORATORY DC POWER SUPPLY <input type="checkbox"/>DELICA DMC-230S DIP METER <input type="checkbox"/>DELICA DMC-470S DIP METER <input checked="" type="checkbox"/>HP 4291B RF IMPEDENCE ANALYZER 																																				

TEST DATA

TEMP.	°C	RH	%	SAMPLE NO.		
WIRE	0.8x100mm	WINDING	1Ts	Q'TY	10pcs	
TEST INSTRUMENTS						
MEAS. ITEM	A mm	B mm	C mm			
Spec.						
	16±0.35	28.5±0.6	8±0.3			
TEST FREQ.						
1	15.92	28.58	8.01			
2	15.94	28.54	8.02			
3	15.95	28.54	8.02			
4	15.91	28.56	8.00			
5	15.92	28.50	7.99			
6	15.90	28.56	8.00			
7	15.91	28.49	8.01			
8	15.92	28.62	7.95			
9	15.96	28.56	7.98			
10	15.91	28.59	8.01			
\bar{X}	15.92	28.55	8.00			
R	0.06	0.13	0.07			

CABLE : 0.8x100mm 2UEW 1Ts
 TEST EQUIPMENT : AGILENT - 4291B
 FIXTURE : HP16092A
 PRINT TIME :
 TEST PARAMETER : |Z| (OHM)

TEST FREQ(MHZ)	1	5	10	25	50	100	200	300	400	500
SAMPLE 1	: 18	63	94	142	179	209	249	294	337	432
SAMPLE 2	: 17	62	94	142	178	209	249	293	340	441
SAMPLE 3	: 17	62	94	142	178	209	249	291	335	433
SAMPLE 4	: 17	62	94	143	179	210	251	293	335	427
SAMPLE 5	: 18	63	94	143	178	210	251	293	337	436
SAMPLE 6	: 18	63	93	143	178	210	251	295	340	433
SAMPLE 7	: 17	62	93	142	178	209	250	292	335	430
SAMPLE 8	: 17	62	93	142	177	209	249	292	336	431
SAMPLE 9	: 17	62	94	142	179	209	249	292	336	430
SAMPLE 10	: 17	61	93	142	177	209	250	294	340	436
AVERAGE	: 17	62	94	142	178	209	250	293	337	433

