


LO1230

<p>(1).DIMENSION(Unit : m/m)</p> 				A	18.0±0.4	m/m
				B	6.0±0.3	m/m
				C	10.0±0.3	m/m
				D		m/m
				E		m/m
				F		m/m
				G		m/m
				H		m/m
				I		m/m
				(2).ELECTRICAL REQUIREMENTS :		
L	uH mH	TEST FREQ.	KHZ MHZ	<p>(3)TEST INSTRUMENTS</p> <input type="checkbox"/> HP 4285A Q.METER <input type="checkbox"/> HP 4285A L.CR METER <input type="checkbox"/> LABORATORY DC POWER SUPPLY <input type="checkbox"/> DELICA DMC-230S DIP METER <input type="checkbox"/> DELICA DMC-470S DIP METER <input checked="" type="checkbox"/> HP 4291B RF IMPEDENCE ANALYZER		
Q		TEST FREQ.	KHZ MHZ			
RDC						
IDC						
Z	20 Min OHM	TEST FREQ.	25 MHZ			
Z	40 Min OHM	TEST FREQ.	100 MHZ			
Z	OHM	TEST FREQ.	MHZ			
Winding	0.8x100mm 2UEW 1Ts					

CABLE : 0.8x100mm 2UEW 1Ts
 TEST EQUIPMENT : AGILENT - 4291B
 FIXTURE : HP16092A
 PRINT TIME :
 TEST PARAMETER : |Z| (OHM)

TEST FREQ(MHZ)	1	5	10	25	50	100	200	300	400	500
SAMPLE 1	: 4	15	20	31	43	63	109	167	245	357
SAMPLE 2	: 4	15	20	31	42	62	109	167	245	357
SAMPLE 3	: 4	14	20	32	42	62	109	167	245	358
SAMPLE 4	: 4	15	21	31	43	63	110	168	246	360
SAMPLE 5	: 4	14	21	31	43	63	110	169	248	365
SAMPLE 6	: 3	14	20	31	43	61	111	169	249	364
SAMPLE 7	: 4	15	20	31	42	62	109	168	246	359
SAMPLE 8	: 3	14	20	30	42	61	110	168	245	356
SAMPLE 9	: 4	15	21	31	42	62	109	167	244	357
SAMPLE 10	: 4	15	20	31	42	62	109	167	246	360
AVERAGE	: 4	15	20	31	42	62	110	168	246	359

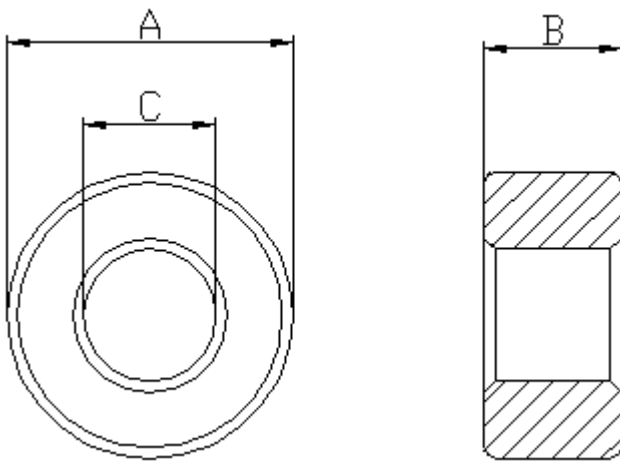