



| | | |
|-----------------------|-----------------------|---|
| Rating | 10A 250V AC | <p style="text-align: center;">Mounting Hole</p>  |
| Contact Resistance | 50m ohm Max. | |
| Insulation Resistance | DC 500V 100M ohm Min. | |
| Dielectric Strength | AC 1000V 1 minute | |
| Operation Temperature | -20°C~80°C | |
| Color | Red | |

- Material:
- Insulation: Nylon#6
- Metal: nickel plated brass.
- $\phi 4.0\text{mm}$ (0.160") banana socket

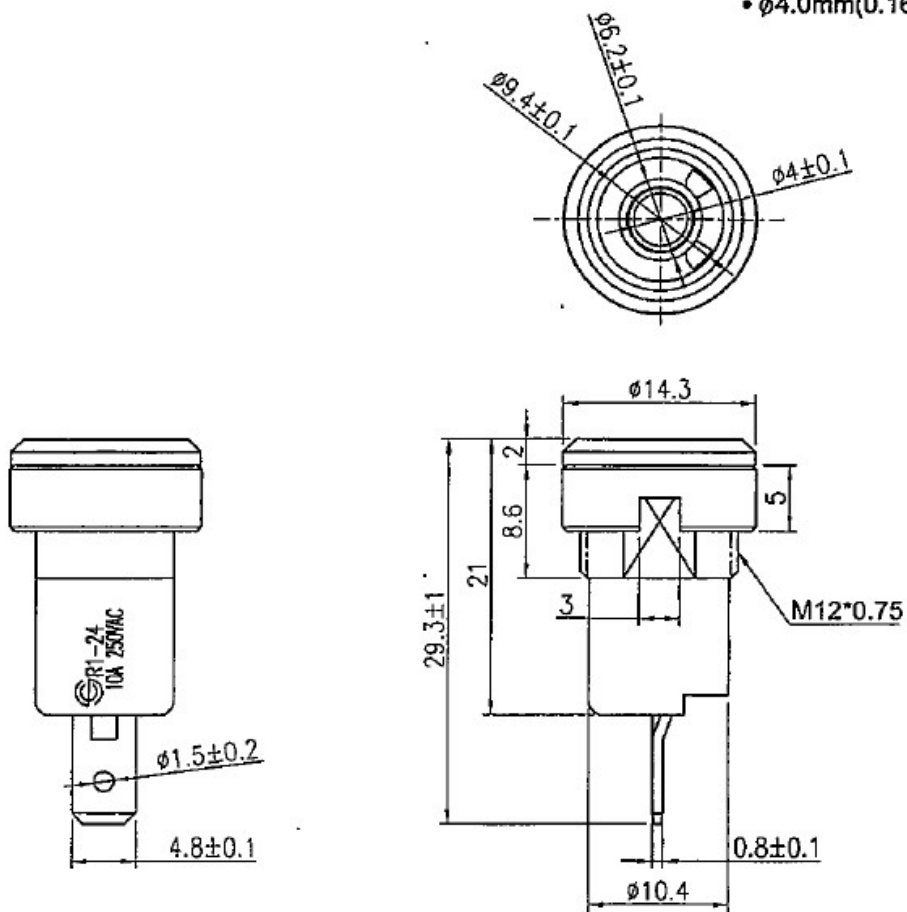

Tolerances ± 0.3 Unless Otherwise Specified