


## Installation



Monitor system use in truck,bus,express car, special vehicle

# USER MANUAL

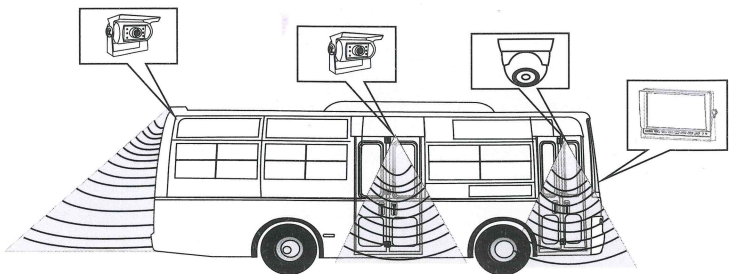

Before operating the Monitor, please read this manual thoroughly and retain it for future reference.

## MONITOR

### 7" monitor

- 1.Down
- 2.Menu
- 3.Up
- 4.Power
- 5.CH1
- 6.CH2
- 7.CH3
- 8.R/C Window
- 9.AV-IN
- 10.Bracket knobs
- 11.Dimmer sensor window



## CAMERA

- QC3536 bus/truck camera
- CCD, 120° viewing angle
- High resolution camera



## CABLE

- 10m 4 PIN extension cable



1

## MONITOR SPECIFICATIONS

Screen size	7 inch
Aspect ratio	16:9
Luminance	250cd/m <sup>2</sup>
Resolution	800*R.G.B*480
Audio& Video	3 ways video input 2 ways audio input , 1 AV input from the front panel
System	PAL&NTSC automatically
Voltage	DC 12V~24V
Language	English/Chinese
OSD Menu	Display menu. Brightness, colour and contrast adjustments.
Built-in speaker	Yes
Bracket Accessories	U type bracket(stand bracket optional)
Sunshade	Included and removable

## CAMERE SPECIFICATIONS


Sensor	SHARP 1/4 CCD
Resolution	420 TV line
illumination	0.5Lux IR night vision
Viewing angle	120°
Images	Mirror & Original image(optional)
System	NTSC/PAL (Optional)
Waterproof class	IP 68, Aluminium alloy shell
Anti-shock class	4G
Power supply	12V DC/12V-24V DC (Optional)

2

Maximum current	< 250mA
Connector	4 pin/RCA
Working temperature	-30°C ~ 70°C
Store temperature	-40°C~80°C
Dimension	86.5mm*77mm*75mm
Weight	300g
Accessories	User manual ,Hexagon wrench, Shockproof gasket

## CONNECTION


4 pin (7")

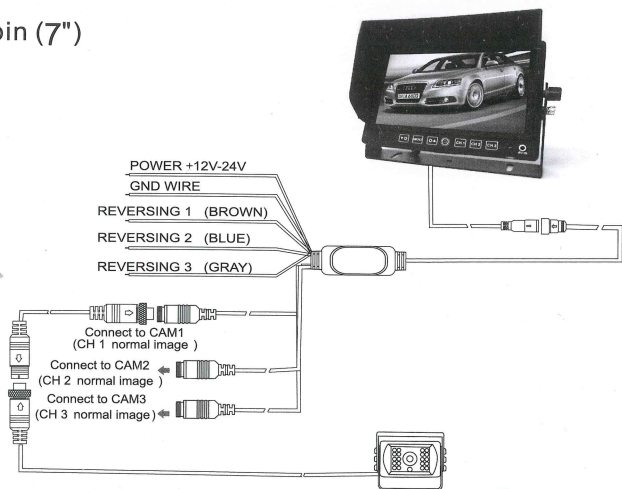

3



## REMOTE CONTROL

- 1.Power
- 2.switch over
3. "+"
- 4.Menu
5. "-"
6. Mode select





## Monitor Standard Installation



1. Remove the screws from the side. Place the U bracket where desired and lock with screws as shown in the pictures.



2. Replace the monitor onto the U bracket and tighten with screws.




3. Once finished installation, the monitor can be tilted 30° up or down.

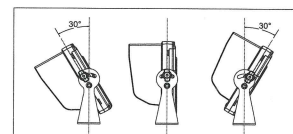


4

## Monitor Installation(Optional)


1. Use screws to lock fan shaped bracket to the desired installation location.

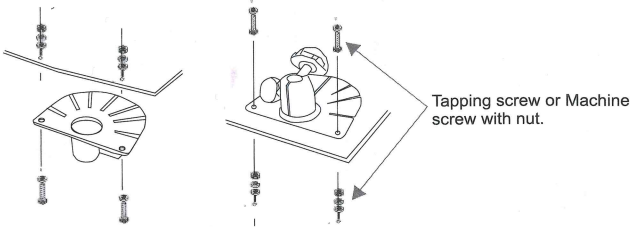

2. Slide the the metal head on the bracket into the gauge on the back of the monitor.

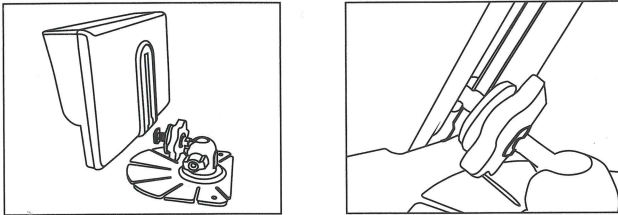


3. Once the monitor is placed at the right height, tighten the knob by turning it clockwise.

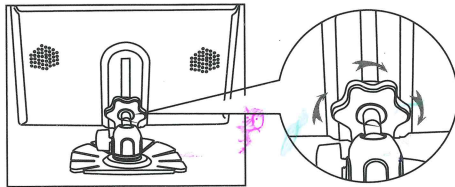







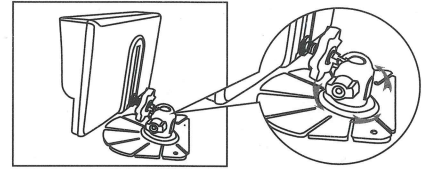

5

4. Untighten the knob on the ball head to change angle of the monitor.



## Accessory

1.Remote control *1	2.User manual *1
	
3.Power cable*1	4 .4pin with adaptor leads *1
	
5 .AV-IN Cable*1	6.Sun shade *1
	
7.Bracket Accessories*1	8. Hexagon wrench *1
	

6