

NEXTECH

QM3752



TFT LCD Monitor with Remote

Instruction Manual



WARNING

KEEP BUTTON BATTERIES OUT OF REACH OF CHILDREN

- If swallowed a lithium button battery may lead to serious or fatal injury in as little as 2 hours, due to chemical burns and potential perforation of the oesophagus.
- Non-lithium button batteries can cause serious injuries if it is swallowed or placed inside any part of the body.
- All button batteries must be kept away from children regardless if they are new or used.
- If you suspect your child has swallowed or inserted a button battery immediately call the 24-hour Poisons Information Centre on 13 11 26 (Australia) or 0800 764 766 (New Zealand) for fast, expert advice.
- If your child is having difficulty breathing contact 000 (Australia) or 111 (New Zealand).
- Dispose of used button batteries immediately and safely out of the reach of children. A battery can still be dangerous even when it can no longer operate the device.
- As soon as you have finished using a button battery, put sticky tape around both sides of it. This will make it harder for children to swallow the button battery and avoid the risk of the battery catching fire.
- Immediately dispose of button batteries immediately out of reach of children, or recycle using a child resistant container and take used cells to your local battery collection centre.

SAFETY FIRST

For your safety, please operate this unit in accordance with your local road and traffic regulations.

- Do NOT watch video while driving
- Do NOT install this product illegally
- Use responsibly

PRODUCT OVERVIEW




1. Power
2. Mode
3. Decrease
4. Menu
5. Increase


FUNCTION & SPECIFICATIONS

7" Digital LCD Panel, 16:9
Resolution: 800x480 RGB
Remote Control Included
Video Standard: PAL & NTSC
Video Sources: 2
Power Supply: DC 12V


CONNECTION

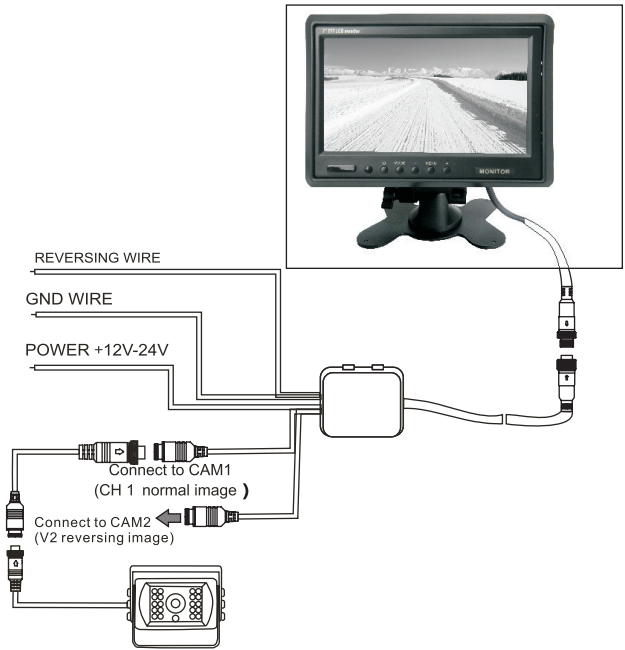

RCA (7")

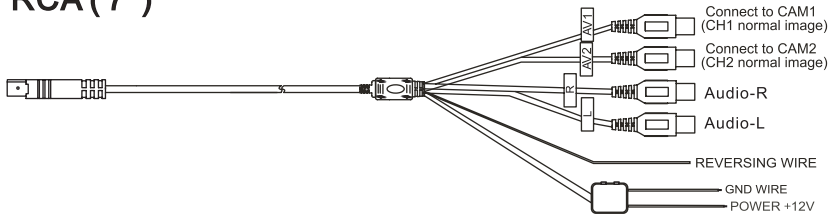

REMOTE CONTROL

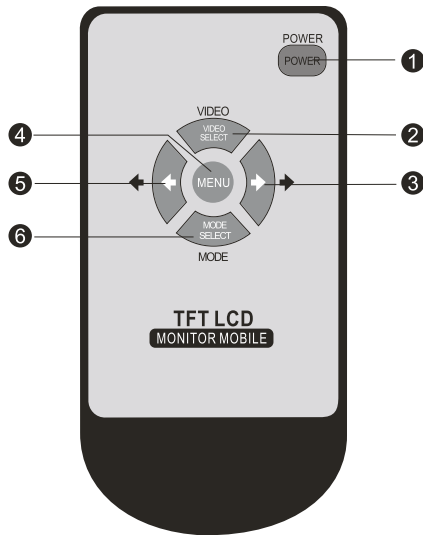


1. Power Button
2. Switch Between Video 1 and Video 2
3. Increase
4. Menu
5. Decrease
6. Mode Selection

BRACKET INSTALLATION


1. Use screws to lock bracket to the desired installation location.



2. Slide the metal head on the bracket into the gauge on the back of the monitor.



3. Once the monitor is placed at the right height, tighten the knob by turning it clockwise.

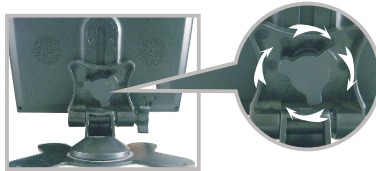

4. Untighten the knob on the ball head to change angle of the monitor.



Distributed by:
Electus Distribution Pty. Ltd.
320 Victoria Rd, Rydalmere
NSW 2116 Australia

www.electusdistribution.com.au

Made in China