


# RE6702

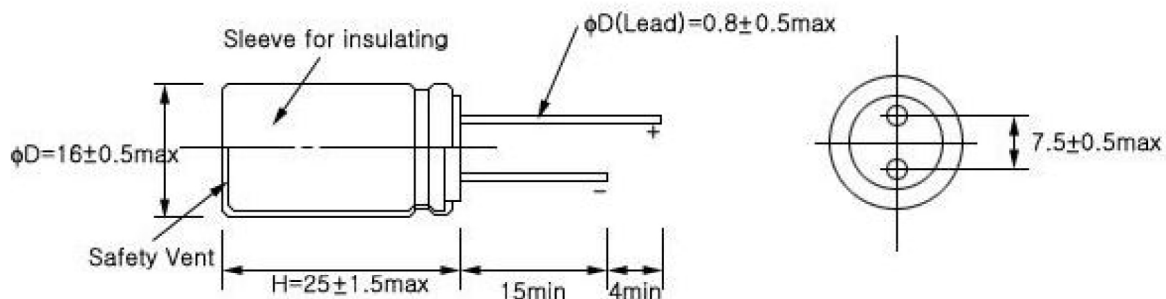

<b>Rated Capacitance</b>		<b>22 F ( Constant current discharge )</b>
<b>Capacitance Tolerance</b>		<b>-10% / +10%</b>
<b>Rated Voltage</b>		<b>2.5 V</b>
<b>Surge Voltage</b>		<b>2.7 V</b>
<b>Internal Resistance (ESR)</b>	<b>AC (1kHz)</b>	<b>25 mΩ</b>
	<b>DC(2.5A)</b>	<b>40 mΩ</b>
<b>Specific Energy Density</b>	<b>Gravimetric</b>	<b>2.45 Wh/kg</b>
	<b>Volumetric</b>	<b>3.80 Wh/L</b>
<b>Operating Temperature</b>		<b>-40 ~ 70 °C</b> <b>( Δ C &lt; 30% of initial value at 25°C )</b>
<b>Storage Temperature</b>		<b>-40 ~ 85 °C</b> <b>( Δ C &lt; 30% of initial value at 25°C )</b>
<b>Cycle life</b>		<b>500,000</b> <b>( Δ C &lt; 30% of initial value )</b>
<b>Life Time</b>		<b>10 years</b> <b>( Δ C &lt; 30% of initial value )</b>
<b>Dimension</b>		<b>Φ 16 x L 25mm</b>
<b>Weight</b>		<b>7.8 g</b>
<b>Volume</b>		<b>5.02 ml</b>