


RE6704

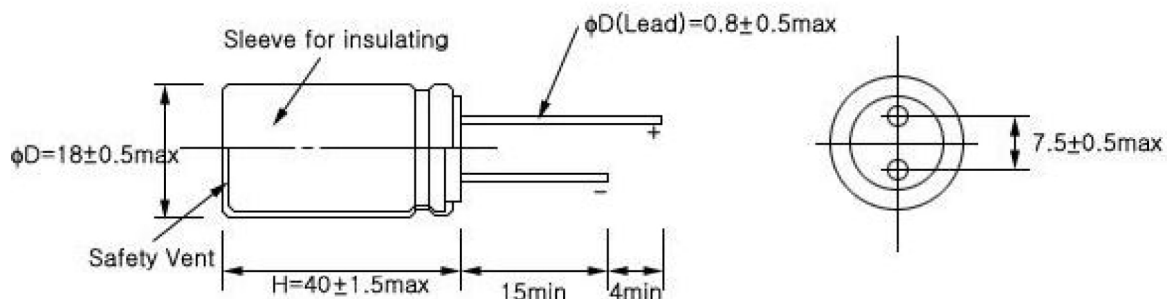

Rated Capacitance		55 F (Constant current discharge)
Capacitance Tolerance		-10%/+10%
Rated Voltage		2.5 V
Surge Voltage		2.7 V
Internal Resistance (ESR)	AC (1kHz)	15 mΩ
	DC(6.0A)	25 mΩ
Specific Energy Density	Gravimetric	3.41 Wh/kg
	Volumetric	4.69 Wh/L
Operating Temperature		-40 ~ 70 °C ($\Delta C < 30\%$ of initial value at 25°C)
Storage Temperature		-40 ~ 85 °C ($\Delta C < 30\%$ of initial value at 25°C)
Cycle life		500,000 ($\Delta C < 30\%$ of initial value)
Life Time		10 years ($\Delta C < 30\%$ of initial value)
Dimension		Φ 18 x L 40mm
Weight		14.0 g
Volume		10.17 ml