



MATERIALS

- Die cast aluminum alloy (ADC12) heat-sink
- PMMA front cover
- Silicone cable
- Anodized polyester powdercoat

PROTECTED AGAINST

- Reverse polarity
- Shock proof, waterproof and UV shielded
- RFI/EMC interference
- Voltage and current surge

OPERATING CONDITIONS

- 9-36V DC input (available the other range)
- Environment temperature -40~+60°C


FEATURES

- Thermal management regulation
- 50,000+ Hours life span
- 3 year warranty


PRODUCT SPECIFICATIONS

Beam Type	Flood
LEDs	PHILLIPS 1.5W * 8LEDs
EMC Y/N	Y
Electric Current (A) (12/24)	1.34/0.61
Power	12Watts
Beam Angle	50°
Peak Beam Intensity (cd)	816
Beam Distance (0.25lux@m)	57
Raw Lumens*	1136
Certificate	CE/E-mark
Waterproof	IP68

DIAGRAM

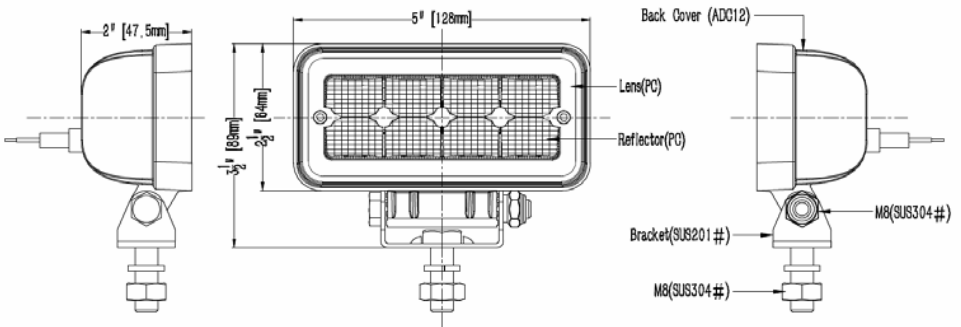

FLOOD BEAM

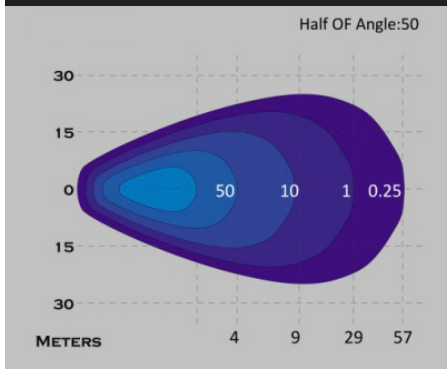

Distributed by:
 Electus Distribution Pty Ltd
 46 Eastern Creek Dr,
 Eastern Creek NSW 2766 Australia
 Ph 1300 738 555

www.electusdistribution.com.au