



Bottom view

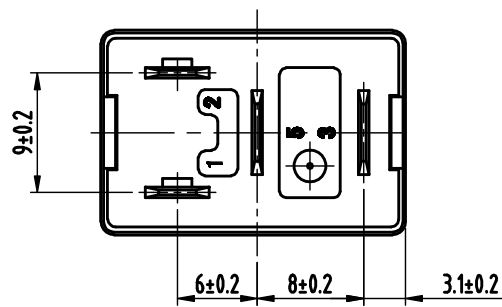

Wiring Diagram



Nominal Voltage	12 Vd. c.
Coil Resistance	98 ± 10% Ω
Parallel Resistor	680 Ω
Pick-up Voltage	< 7.2 Vd. c. (20°C)
Drop-out Voltage	> 1.2 Vd. c. (20°C)
Contact Material	AgSnO ₂ In ₂ O ₃
Contact voltage drop	< 100 mV (13.5 Vd. c., 10 A)
Contact Rating	NO 30A, 14Vd. c. (Res. load)
Electrical life	1 × 10 ⁵
Mechanical life	1 × 10 ⁷
Insulation Resistance	> 100 MΩ, 500 Vd. c.
Dielectric Strength	500 Va. c., 1 min
Ambient temperature	-40°C ~ 125°C
Cover color	Black
Termination	Plug-in

Type MC2	Date	2007·07·18	PROJECTION 	TITLE MC2/012-1HRF	
	Design	zhuweisi			
Size A3	Check	chenminxiao	SCALE 2:1	DWG.No.	Version No. 0
	Approve	huzhongrui			
Xiamen Level King Keep Electronics Co.,Ltd					