
## XC4336 User Guide

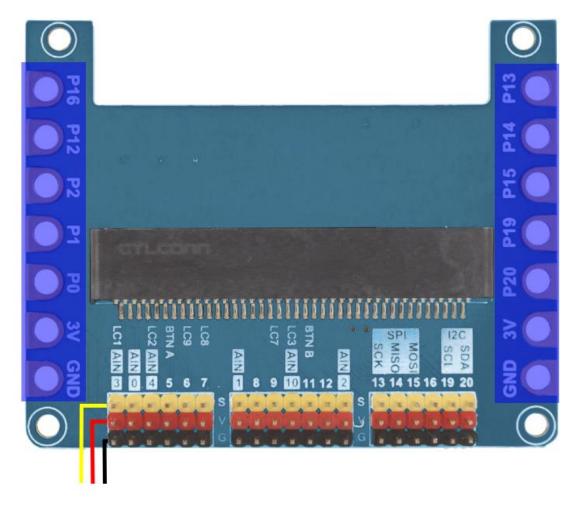

To use the sensor shield adapter, you can either directly plug onto the connections on the board using jumper wires, or via alligator clips on the side of the board.

Colour	Туре
	Power output from Micro:bit
	Ground connections
	GPIOs 0 to 20
	Alligator clip connections – GND, 3V & 10 GPIOs

Australia
www.jaycar.com.au
techstore@jaycar.com.au
1800 022 888

New Zealand www.jaycar.co.nz techstore@jaycar.co.nz 0800 452 922

