


Part No.	ZD0232	Diff No. 004
2x5x7 mm	Rectangular	Type : LED Lamps

Package Dimension :

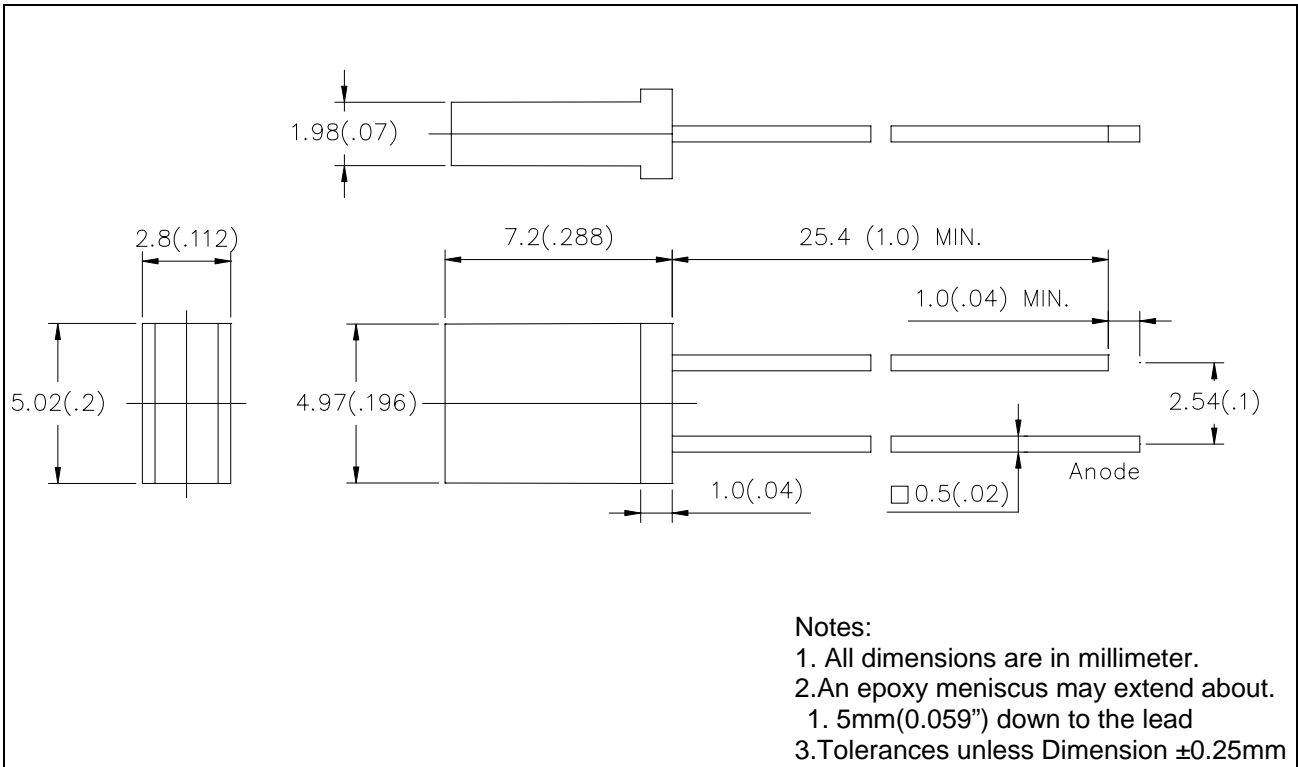

■ Features :

- Choice of various viewing angles.
- Available on Tape and Reel.
- Reliable and robust.

■ Descriptions :

- The series is specially designed for application requiring higher brightness.
- The LED lamps are available with different color, intensities, epoxy colors etc.

■ Applications :

- TV set
- Monitor
- Telephone

Part No. **ZD0232** Diff No. 004
 2x5x7 mm Rectangular Type : LED Lamps

PART NO.	Chip		Lens Color
	Material	Emitted Color	
AL-R253GD-004	GaP	Green	Green Diffused

■ Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Rating	Unit
Continuous Forward Current	I_F	20	mA
Operating Temperature	T_{opr}	-25 to +80	°C
Storage Temperature	T_{stg}	-40 to +100	°C
Soldering Temperature	T_{sol}	260 ± 5	°C
Electrostatic Discharge	ESD	1000	V
Power Dissipation	P_D	100	mW
Peak Forward Current (Duty 1/10@1KHz)	I_F (Peak)	100	mA
Reverse Voltage	V_R	5	V

■ Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	I_V	12	15	/	mcd	$I_F=20mA$
Viewing Angle	2θ1/2	/	155	/	deg	$I_F=20mA$
Peak Wavelength	λ_p	/	578	/	nm	$I_F=20mA$
Dominant Wavelength	λ_d	/	573	/	nm	$I_F=20mA$
Spectrum Radiation Bandwidth	$\Delta \lambda$	/	30	/	nm	$I_F=20mA$
Forward Voltage	V_F	/	2.3	2.6	V	$I_F=20mA$
Reverse Current	I_R	/	/	50	μA	$V_R=5V$

Part No. **ZD0232** Diff No. 004
 2x5x7 mm Rectangular Type : LED Lamps

■ Reliability test items and conditions :


NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ±5°C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5min L : -55°C 30min	50 CYCLES	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10set L : -10°C 5min	50 CYCLES	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	TEMP : 25°C I _F =20mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 HRS	76 PCS	0/1

Part No.
2x5x7 mm


ZD0232
Rectangular

Diff No. 004
Type : LED Lamps


■ Typical Characteristics (The data typical , and the value is not guaranteed.)

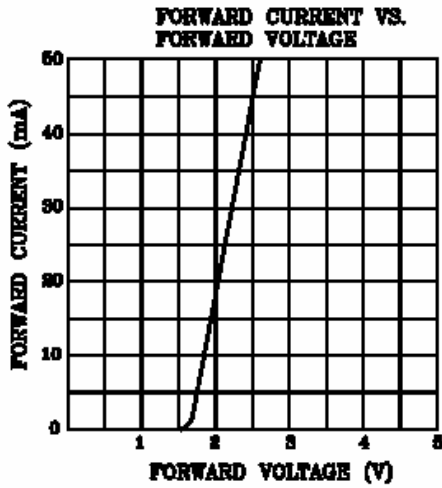


Relative Luminous Intensity-IF

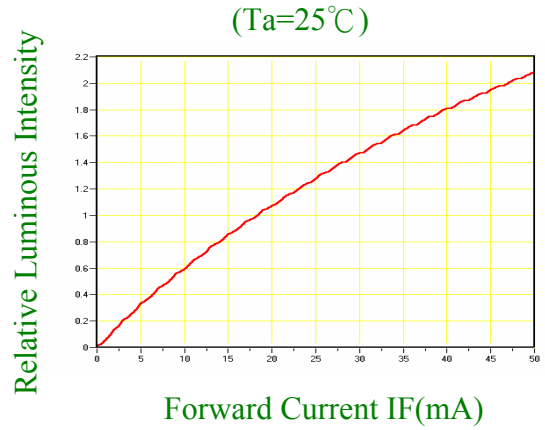

Wavelength Characteristics
(Ta=25°C)

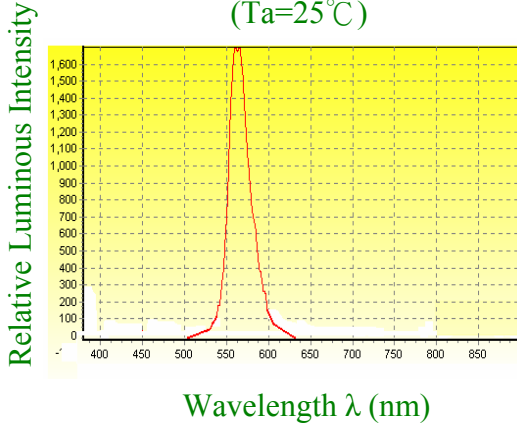

Relative Luminous Intensity-Ta

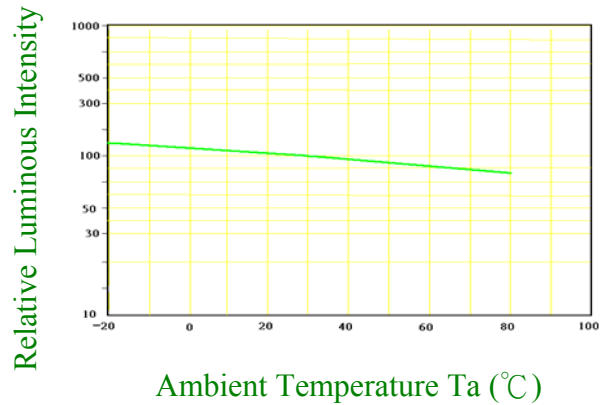

IF-Ta

